



LEGENDEX ROCK SLIDERS

PRODUCT CODE: P-RS-COL-2

Holden Colorado 2012-2020



CHECK YOUR PACK LIST

Once you have unpacked the system from the box make sure you have all parts that are listed on the packing list below.

COMPONENTS

P-RS-COL-P SLIDER PASSENGER SIDE x 1

P-RS-COL-D SLIDER DRIVERS SIDE x 1

13 TPI BOLTS BOLTS x 4

TOOLS REQUIRED

- 19mm Spanners | Ratchet Spanner Ideal
- Bottle Jack | Trolley Jack Ideal
- Timber Block | Rubber Ideal
- Rubber Mallet
- 13mm Drill Bit + Drill
- Floor Mat
- Portable Light
- Flat Head Screwdriver | Large

PRODUCT CODE: (P-RS-COL-2)

IMPORTANT BEFORE INSTALLATION

- If you have had electrical work completed – please check chassis for existing wiring. You will not be able to install until this has been removed and re-wired.
- Before installing your sliders park your vehicle on level ground ensuring it is in gear (or Park) and the handbrake is applied. Never use a jack to support the weight of the vehicle while working on it.
- Wear protective clothing including eye wear

REMOVING ORIGINAL SIDE STEPS

- BEFORE YOU START – DOUBLE CHECK – that you have the correct sliders for the job.
- Check the invoice and the packaging.
- Remove packaging: Check you have all the correct parts and no damage from freight.
- You might need to wash the underbody before starting the job.
- Generously spray the bolts with WD40 (or other spray lube) and leave to penetrate.
- Each 4wd is different so you'll need to identify the correct spanner size
- Once remover – KEEP just in case.

INSTALLING YOUR NEW ROCK SLIDERS // DRIVER SIDE

STEP 1

Unpack and remove the bolts attached to the mounting points and put these aside, align the slider with the body and chassis using a jack.

STEP 2

It can be tight- 2-3mm of play, so the jack or mallet can help with that last few mm. Loosely tighten the front first then the rear and middle.

STEP 3

Once they are on, check that they are level – you may need to jack up one end of the other until you are satisfied with how it sits. Triple check sliders fit correctly and tighten all bolts 100%



INSTALLING YOUR NEW ROCK SLIDERS // PASSENGER SIDE

PRODUCT CODE: (P-RS-COL-2)

STEP 1


Start by un-clipping the lines and moving away from the chassis shown in image 1, They are located where the centre bracket will go.

Then Un-bolt the line shown in image 2 which is located at the rear where the rear bracket will be placed



STEP 2

Now align the slider with the body and chassis using a jack. Loosely tighten the front first shown in image 3 as this is the toughest bracket

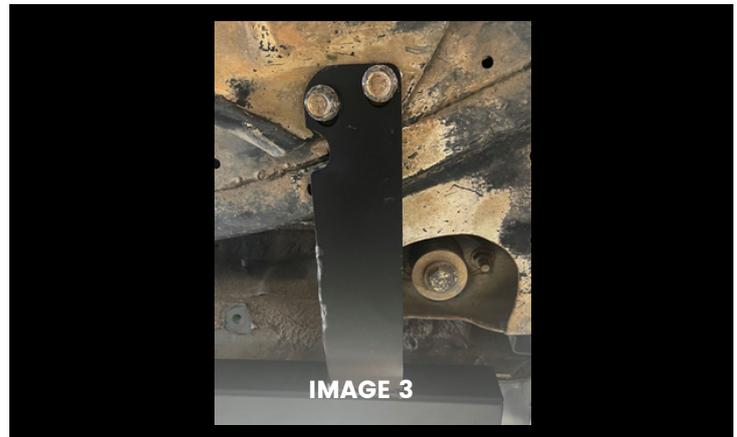

STEP 3

Next, the rear bracket, align the slider with the body and chassis using a jack. Bolt the bracket up loosely where the line sits against the bracket shown in image 5,

The line will not need to be re-bolted as the slider bracket creates enough tension for the line to sit in place



STEP 4

Next, the Centre bracket, align the slider with the body and chassis using a jack. Bolt the bracket up loosely where the line sits against the bracket shown in image 6,

Then Re-clip the lines back into place as shown in her image 7



INSTALLING YOUR NEW ROCK SLIDERS // PASSENGER SIDE

PRODUCT CODE: (P-RS-COL-2)

STEP 5

Once they are on, check that they are level – you may need to jack up one end of the other until you are satisfied with how it sits. Triple check sliders fit correctly and tighten all bolts 100%

MAINTAINANCE OF ROCK SLIDERS

FINAL NOTES ONCE SLIDERS ARE FITTED

NOW THAT THE SLIDERS ARE FITTED TO YOUR VEHICLE:

- Double check all nuts and bolts are tight.
- Start the vehicle and listen for any vibration / rattle noises.
- Check the tread plate bolts are tight as well.
- Also re-check tightness of the bolts after 20-50km

WASHING AND RE-CHECKING

- DO wash after use – using a hose – NOT high-pressure cleaner
- IF you have damaged your coating in use- a high-pressure cleaner can/ will get underneath and lift the coating.
- If you notice any damage to the coating – respray with paint or underbody spray
- After every 4wd trip—re-tighten the bolts.
- After every 4wd trip—check the alignment of the slider.



THANKS FOR CHOOSING A LEGENDEX PRODUCT

If you're on Facebook or Instagram we would love to show off your vehicle on our page. Simply tag us in a post with photos of your Legendex product using the tags below and we will feature your vehicle. @legendex on Facebook and Instagram