



# LEGENDEX SNORKEL

PRODUCT CODE: AS-JNY-2

**Suzuki Jimny 2018-2022**



# CHECK YOUR PACK LIST

Once you have unpacked the system from the box make sure you have all parts that are listed on the packing list below.

## COMPONENTS

3.5" stainless steel Snorkel	1
3.5" – 3" straight silicon joiner	1
3" – 2.5" 90 silicon joiner	1
2.5" 90 silicon joiner	2
3" stainless tube Incl duckbill	1
2.5" stainless tube	400mm
2.5" stainless tube	100mm
#56 hose clamp	2x50mm
#48 hose clamps	1
#42 hose clamps	2
Stainless screws	7
4wd vacuum bracket	3
Vacuum hose	600m
Cannister mount	1

## TOOLS REQUIRED

- Masking tape
- 90mm hole saw or tinsnips
- Screwdriver
- Hammer
- scissors
- Drill

# INSTALLING YOUR NEW SNORKEL

PRODUCT CODE: AS-JNY-2


## STEP 1

Firstly, tape the front drivers guard and the inner side of the A-pillar with masking tape (this is to prevent scratches when making the hole).



## STEP 2

Cut the hole out of the template before placing it and taping it on the guard. Then use a marker to mark the hole directly on the guard after lining it up correctly

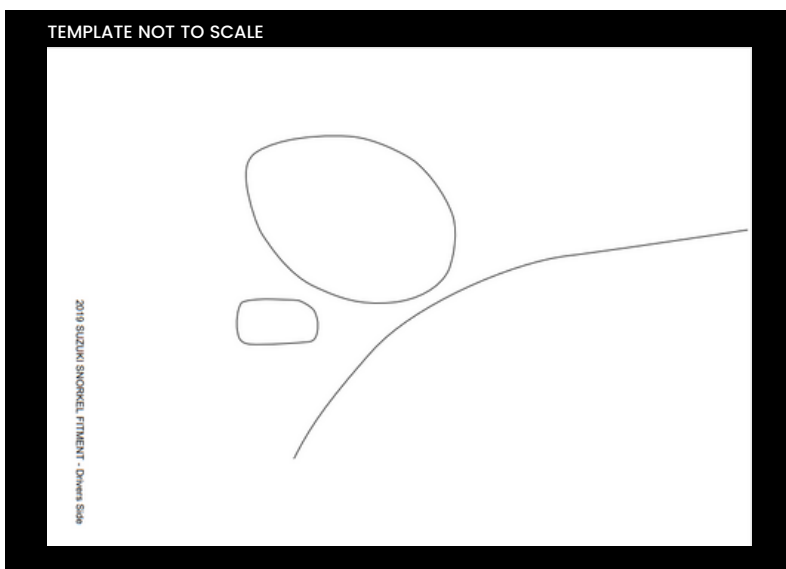

## STEP 3

Unscrew and remove the plastic guard liner from under the guard and remove the plastic pipe to the airbox



# INSTALLING YOUR NEW SNORKEL

PRODUCT CODE: AS-JNY-2

## STEP 4

Cut the hole in the guard (We use a 90mm hole saw and floppy disk, you can use tinsnips) then Use a file to remove any excess steel from around the hole (inside and out).



## STEP 5

Hammer the inside of the inner guard (as per photo) till the snorkel slides in then prime the bare steel with paint.



## STEP 6

Run the provided pinch weld rubber around the hole and trim it accordingly.



# INSTALLING YOUR NEW SNORKEL

## STEP 7

Insert the snorkel into the hole to a position it fits best then put snorkel bracket in the a-pillar and close door. Stand back and make sure it fits and lines up perfectly. Adjust the hole slightly if need be.



## STEP 8

Remove the canister from behind the guard and install it into the engine bay (see photo). Unclip the wiring loom (2 clips) and the bracket gets bolted onto the radiator support



## STEP 9

Mount the bracket inside the A-pillar using the nutserts provided. You will need 9mm holes for the nutserts



# INSTALLING YOUR NEW SNORKEL

PRODUCT CODE: AS-JNY-2

## STEP 10

Use the 3.5-3" straight silicon joiner (you will have to trim to fit properly), 3.5" end goes onto the snorkel



## STEP 11

The 3" stainless tube then runs down the inside of the guard to the 3-2.5" 90° silicon join which goes in behind the headlight



## STEP 12

The 2.5" 90° silicon joiner then connects to the 2.5" 45° Silicon joiner with the stainless tube provided




# INSTALLING YOUR NEW SNORKEL

---

PRODUCT CODE: AS-JNY-2


## STEP 13

With the other piece of stainless tube you will need to connect the 2.5-2" 90° which then connects to the airbox

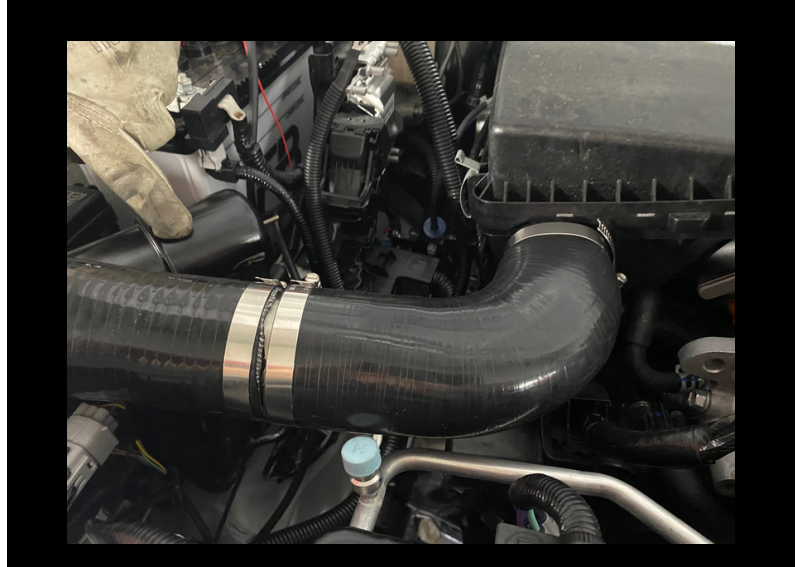

## STEP 14

Re-install the plastic liner under the guard

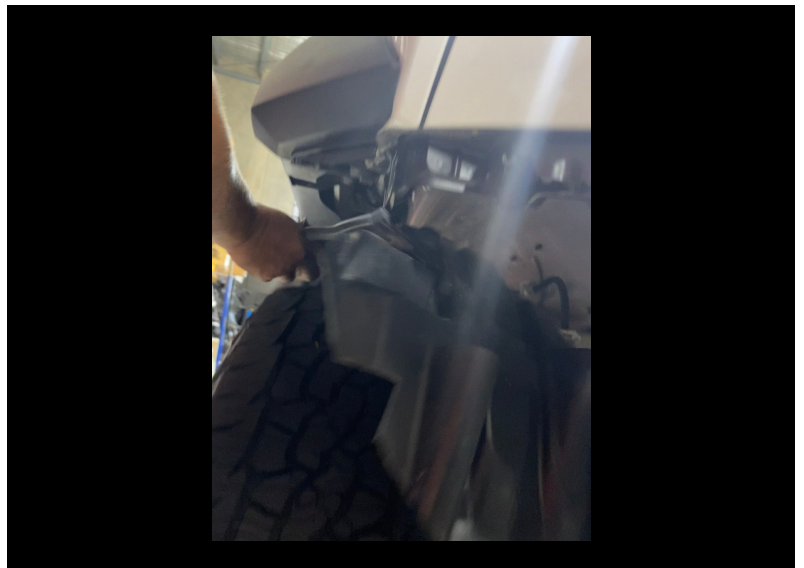

# NOTES

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---



## THANKS FOR CHOOSING A LEGENDEX PRODUCT

Make sure to join "The Legendex Nation" Facebook group to show off your rig, share your knowledge and support other legends who share the same passion for getting off-road and exploring Australia.

Be sure to follow us on Instagram @legendex and use the #legendexnation hashtag on your post to be featured!